

Standby Power Rating

45 kW 60 Hz CA

Liquid Cooled
Gas Engine
Generator Sets

South Coast Air Quality Management District (SCAQMD)
Emission Certified For Standby Generator Application

Model Number: 5340 (Steel - Tan)



WHISPER-TEST™



Whisper-Test™

Low Speed Exercise
61 dB(A) at 23 feet

GENERAC 2.4L ENGINE

Naturally Aspirated
Gaseous Fueled

UL 2200 Listed

Transfer Switch is sold separately

STANDARD EQUIPMENT

- All input connections in one single area
- High coolant temperature shutdown
- Low oil pressure shutdown
- Low coolant level automatic shutdown
- Overspeed automatic shutdown
- Crank timer
- Exercise timer
- Oil drain extension
- Cool flow radiator
- Closed coolant recovery system
- UV/Ozone resistant hoses
- Watertight state of the art electrical connectors
- Mainline circuit breaker
- Radiator drain extension
- Battery charge alternator
- 2 Amp static battery charger
- Battery rack and battery cables
- Fan and belt guards
- Isochronous governor
- Flex fuel line pigtail
- Emission certified in standby application (200 hrs/yr)

FEATURES

- Innovative design and fully prototype tested
- UL 2200 Listed
- Solid state frequency compensated voltage regulator
- Dynamic and static battery charger
- Sound attenuated acoustically designed enclosure
- *Whisper-Test™* for low noise level exercise
- High flow low noise factory engineered exhaust system
- State of the art control system with R-Series digital control panel
- Rodent proof construction
- High efficiency, low distortion Generac designed alternator
- Vibration isolated from mounting base
- Matching Generac transfer switches engineered and tested to work as a system
- All components easily accessible for maintenance
- Electrostatically applied textured powder paint
- Acoustically designed engine cooling system
- Exhaust catalyst and air/fuel ratio controller



APPLICATION & ENGINEERING DATA

STANDBY 45 kW CA

GENERATOR SPECIFICATIONS

TYPE Synchronous
ROTOR INSULATION Class H
STATOR INSULATION Class H
TOTAL HARMONIC DISTORTION <5%
TELEPHONE INTERFERENCE FACTOR (TIF) <50
ALTERNATOR OUTPUT LEADS 3 PHASE 4 wire
BEARINGS Sealed Ball
COUPLING Flexible Disc
LOAD CAPACITY (STANDBY RATING) 45 kW
EXCITATION SYSTEM Direct

NOTE: Generator rating and performance in accordance with ISO8528-5, BS5514, SAE J1349, ISO3046, and DIN6271 standards.

VOLTAGE REGULATOR

TYPE Electronic
SENSING Single Phase
REGULATION $\pm 1\%$
FEATURES V/F Adjustable
Adjustable Voltage and Gain
LED Indicators

GENERATOR FEATURES

- Revolving field heavy duty generator
- Directly connected to the engine
- Operating temperature rise 120 °C above a 40 °C ambient
- Insulation is Class H rated at 150 °C rise
- All models are fully prototyped tested

CONTROL PANEL FEATURES

- SEVEN LED INDICATOR LIGHTS
 - System ready
 - Low fuel pressure
 - Low battery
 - Low oil pressure
 - High coolant temp/low coolant temp
 - Overspeed
 - Overcrank
- INTERNAL FUNCTIONS:
 - 3 position switch (auto, off and manual)
 - 2 wire start for any transfer switch
 - Communicates with the Generac RTS transfer switch
 - Built-in 7 day exerciser
 - Selectable engine speed at exercise
 - Governor controller is built into the master control board
 - Temperature range -40 °C to 70 °C
- ADDITIONAL FUNCTIONS
 - Utility sensing
 - Delay on utility failure for engine start
 - Engine warm-up before transfer
 - Delay to retransfer to utility
 - Engine cooldown timer
 - Exerciser not set

ENGINE SPECIFICATIONS

MAKE Generac
MODEL Inline 4
CYLINDERS 4
DISPLACEMENT 2.4 Liter, 146 cu. in.
BORE 3.41
STROKE 3.94
COMPRESSION RATIO 8.5:1
INTAKE AIR SYSTEM Naturally Aspirated
VALVE SEATS Precision ground
LIFTER TYPE Overhead Valve Push Rod, Hydraulic

GOVERNOR SPECIFICATIONS

TYPE Electronic
FREQUENCY REGULATION Isochronous
STEADY STATE REGULATION $\pm 0.25\%$

ENGINE LUBRICATION SYSTEM

OIL PUMP Gear
OIL FILTER Full flow spin-on cartridge
CRANKCASE CAPACITY 4 Quarts

ENGINE COOLING SYSTEM

TYPE Pressurized Closed
WATER PUMP Belt driven
FAN SPEED 2060
FAN DIAMETER 22 inches
FAN MODE Pusher

FUEL SYSTEM

FUEL TYPE Natural gas, propane vapor
CARBURETOR Down Draft
SECONDARY FUEL REGULATOR Standard
FUEL SHUT OFF SOLENOID Standard
OPERATING FUEL PRESSURE 5" - 14" H₂O

ELECTRICAL SYSTEM

BATTERY CHARGE ALTERNATOR 12V 30 Amp
STATIC BATTERY CHARGER 2 Amp
RECOMMENDED BATTERY Group 26, 525 CCA
SYSTEM VOLTAGE 12 Volts



STANDBY 45 kW CA


OPERATING DATA

		STANDBY 45 kW CA		
KW RATING		45		
ENGINE SIZE		2.4 Liter		
GENERATOR OUTPUT VOLTAGE/KW - 60Hz 120/240V, 1-phase, 1.0 pf		KW 45	AMP 187.5	CB Size 200
GENERATOR LOCKED ROTOR KVA AVAILABLE @ VOLTAGE DIP OF 35% Single phase		100		
ENGINE FUEL CONSUMPTION (Natural Gas) (Propane)		Natural Gas	Propane	
		(ft ³ /hr.)	(gal/hr.)	cu ft/hr
Exercise cycle		102	1.11	40.4
25% of rated load		194	2.12	77.1
50% of rated load		373	4.07	148
75% of rated load		520	5.67	206.3
100% of rated load		720	7.86	286
ENGINE COOLING				
Air flow (inlet air including alternator and combustion air) ft ³ /min.		2,725		
System coolant capacity US gal.		3.0		
Heat rejection to coolant BTU/hr.		173,000		
Max. operating air temp. on radiator °C (°F)		60 (150)		
Max. ambient temperature °C (°F)		50 (140)		
COMBUSTION AIR REQUIREMENTS				
Flow at rated power 60 Hz cfm		144		
SOUND EMISSIONS IN DBA				
db(A) @ 23 feet in exercise mode		61		
db(A) @ 23 feet at normal operating load		73		
EXHAUST				
Exhaust flow at rated output 60 Hz cfm		429		
Exhaust temp. at muffler outlet °F		1150		
ENGINE PARAMETERS				
Rated synchronous RPM 60 Hz		3600		
HP at rated KW 60 Hz		71		
POWER ADJUSTMENT FOR AMBIENT CONDITIONS				
Temperature Deration				
3% for every 10 °C above - °C		25		
1.65% for every 10 °F above - °F		77		
Altitude Deration				
1% for every 100 m above - m		183		
3% for every 1000 ft. above - ft.		600		



RATING: All single phase units are rated at 1.0 power factor. STANDBY RATING: Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046-1. Design and specifications are subject to change without notice. Maximum wattage and current are subject to and limited by such factors as fuel Btu content, ambient temperature, altitude, engine power and condition, etc.

INTERCONNECTIONS

STANDBY 45 kW CA

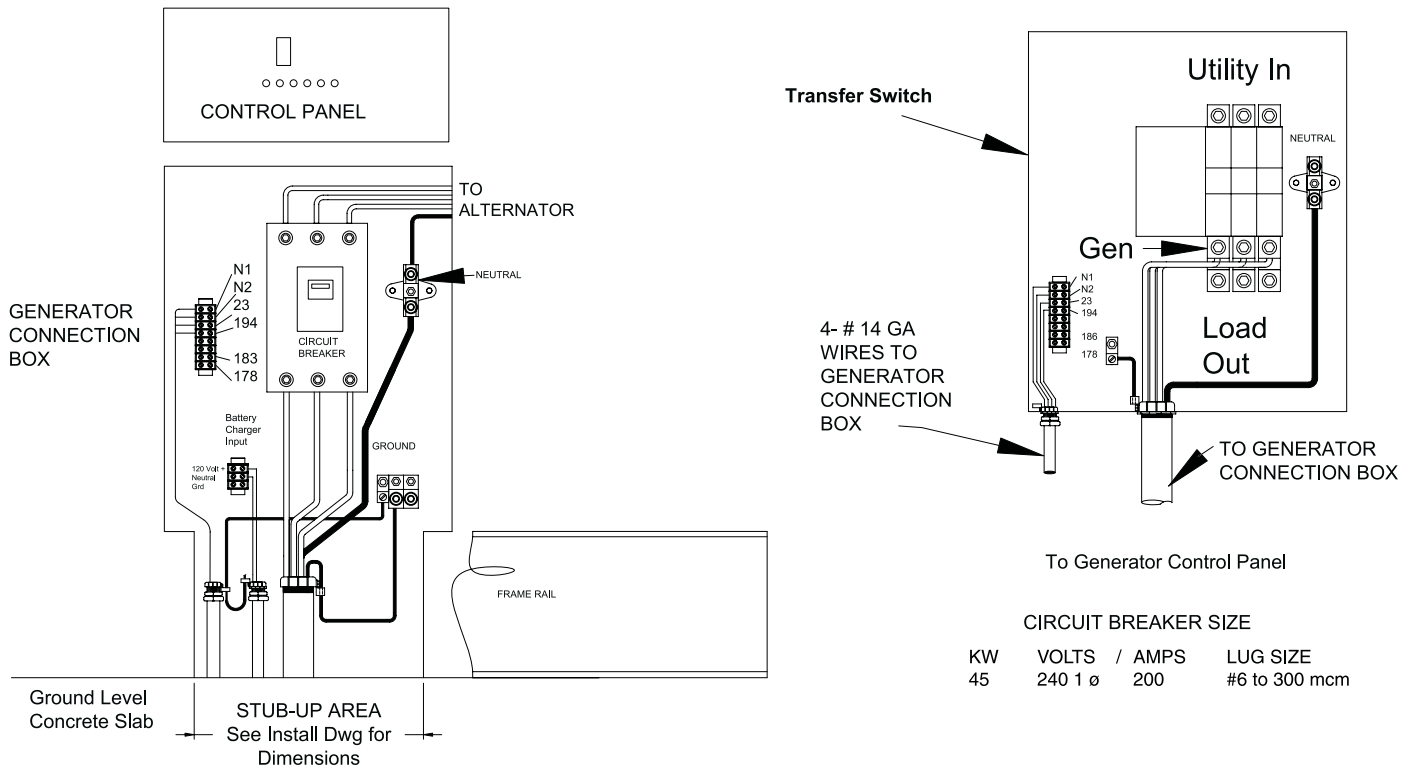

INSTALLATION LAYOUT

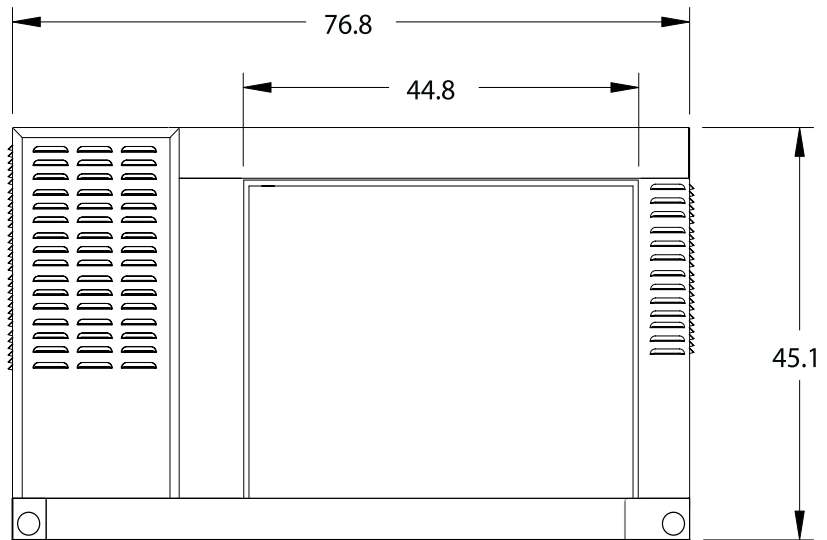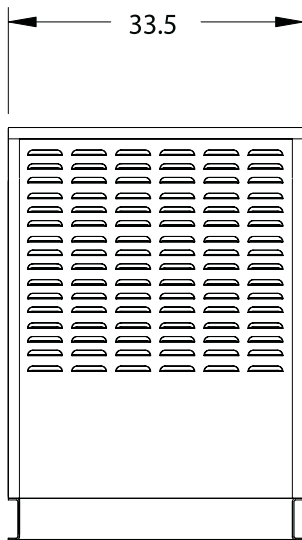

UNIT WEIGHT: Steel 1414 lbs.

GENERAC® POWER SYSTEMS, INC. • P.O. BOX 297 • WHITEWATER, WI 53190
www.guardiangenerators.com